

## Clariss<sup>®</sup> Filter Cartridges

### For visible particle reduction

#### Description

Clariss filter cartridges deliver consistent performance for general liquid clarification applications.

The Clariss filter cartridges feature multiple fiber zones and an extruded core. Combined these features provide effective particle removal and the most cost efficient solution for applications within the food and beverage industry.

#### Quality

- Cartridges produced in a controlled environment
- Manufactured according to ISO 9001:2008 certified Quality Manufacturing System

#### Food Contact Compliance

Please refer to the Pall website <http://www.pall.com/foodandbev> for a Declaration of Compliance to specific national legislation and/or regional Regulatory requirements for food contact use.



Clariss Filter Element

#### Media

- All polypropylene
- Graded pore structure
- Resists Shedding
- Does not employ adhesives or surfactants

#### Cartridge

- Extruded core for disposal ease and no flow restriction
- Consistent performance
- High void volume for high dirt holding capacity
- Available in multiple configurations

## Technical Information

### Operating Characteristics in Compatible Fluids

Maximum Differential Pressure	Recommended Change out Differential Pressure	Operating Temperature
3.45 bard (50 psid)	2.4 bard (35 psid)	20 °C (68 °F)
1.72 bard (25 psid)	-	60 °C (140 °F)

Compatible fluids are defined as those which do not swell, soften or attack any of the filter components

## Ordering Information

This information is a guide to the part number structure and possible options. For availability of specific options please contact Pall. Refer to Pall for housing details.

Part Number: CLR  Table 1  Table 2  Table 3 **W**  Table 4

Table 1: Filter Grade

Code	Description
1	1 µm
3	3 µm
5	5 µm
10	10 µm

Table 2: Length

Code	Description
<b>DOE Style only:</b>	
5	5" (127 mm)
975	9.75" (248 mm)
9875	9.875" (251 mm)
10	10" (254 mm)
195	19.5" (495 mm)
20	20" (508 mm)
2925	29.25" (743 mm)
295	29.5" (749 mm)
30	30" (762 mm)
39	39" (991 mm)
40	40" (1016 mm)
50	50" (1270 mm)
<b>SOE Style only:</b>	
10	10" (254 mm)
20	20" (508 mm)
30	30" (762 mm)
40	40" (1016 mm)

Table 3: Adapter


Code	Description
blank	DOE with no endcaps
M3	SOE - single open end with flat closed end and external 222 O-rings
M6	SOE - single open end with flat closed end and external 226 O-rings
M7	SOE - single open end with fin end and external 226 O-rings
M8	SOE - single open end with fin end and external 222 O-rings

Table 4: O-ring Seal Material\*

Code	Description
S	Silicone Elastomer
E	Ethylene Propylene Rubber

\*Available only in M3, M6, M7 and M8 styles

## Flow Rates

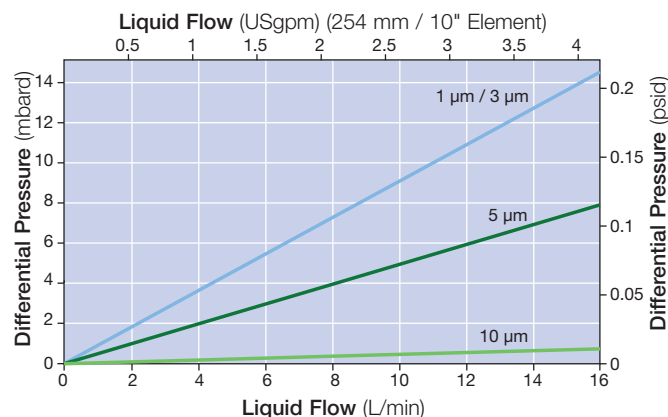

\* For clean water at ambient temperature for liquids of viscosity other than 1cP multiply the  $\Delta P$  by the viscosity in cP.



Pall Food and Beverage

25 Harbor Park Drive  
Port Washington, NY 11050  
+1 516 484 3600 telephone  
+1 866 905 7255 toll free US

Portsmouth - UK  
+44 (0)23 9230 2269 telephone  
+44 (0)23 9230 2509 fax  
industrialeu@pall.com

Visit us on the Web at [www.pall.com/foodandbev](http://www.pall.com/foodandbev)

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to [www.pall.com/contact](http://www.pall.com/contact)

Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit [www.pall.com](http://www.pall.com) to verify that this information remains valid. Products in this document may be covered by one or more of the following patent numbers: EP 1,165,205; US 6,342,283; US 6,662,842.

© Copyright 2009, Pall Corporation. Pall, and Claris are trademarks of Pall Corporation.  
® Indicates a trademark registered in the USA. *Filtration. Separation. Solution.* is a service mark of Pall Corporation.